Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Vito

Supplier's address: vitoEU, STR. IZTOCHNA TANGENTA 102 4TH FLOOR 1528 SOFIA/BULGARIA

Model identifier: 2027443

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	Wires		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	Yes	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	18	Energy efficiency class	E
Useful luminous flux (ϕuse), indicating if it refers to the flux in a sphere (360º), in a wide cone (120º) or in a narrow cone (90º)	1 980 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000 or 4 000 or 6 500
On-mode power (P_{on}), expressed in W	18,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control — Height	31	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
Outer dimensions without separate control gear, lighting control — Width	214		
Outer dimensions without separate control gear, lighting control — Depth	214		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power[(a)]		-	If yes, equivalent power (W)	-
			Chromaticity coordinates (x and y)	0,375 0,377
Parameters for directional light sources:				
Peak luminous intensity (cd)		630	Beam angle in degrees, or the range of beam angles that can be set	120
Parameters for LED and OLED light sources:				
R9 colour rendering index value		10	Survival factor	0,90
the lumen maintenance factor		0,90		
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ1)		0,60	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.		-[(b)]	If yes then replacement claim (W)	-
Flicker metric (Pst LM)		0,1	Stroboscopic effect metric (SVM)	0,1

[(a)] '-' : not applicable;

[(b)] '-' : not applicable;

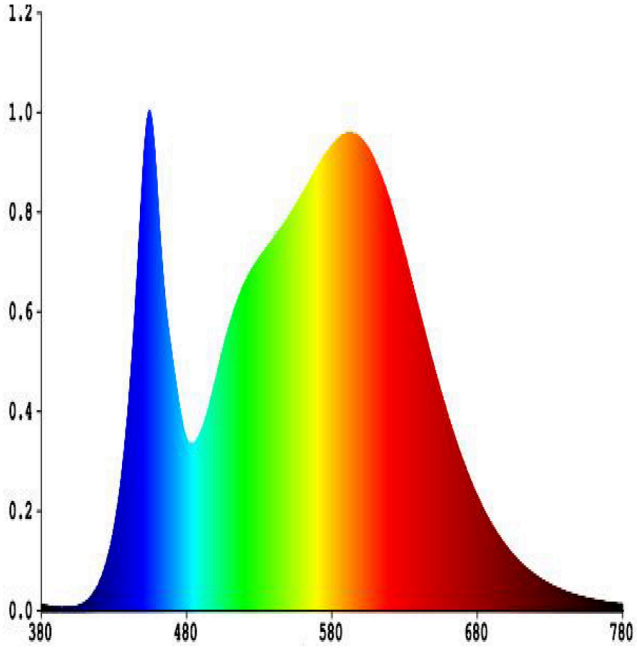
1.2
1.0
0.8
0.6
0.4
0.2
0.0
380
480
580
680
780

EPREL registration number: 2725533 Model placed on the Union market from 20/05/2026.	https://eprel.ec.europa.eu/qr/2725533

Supplier: VITO EUROPE Ltd. (Importer) **Website:** www.vitolighting.com

Customer care service:

Name: vitoEU **Website:** www.vitolighting.com

Email: u.yildiz@vitoeurope.com **Phone:** +35924341574

Address:
STR. IZTOCHNA TANGENTA 102 4TH FLOOR 1528 SOFIA/BULGARIA