


Product Data Sheet

OUTDOOR LIGHTING

TECHOLED-2 200W

CODE: 3022970

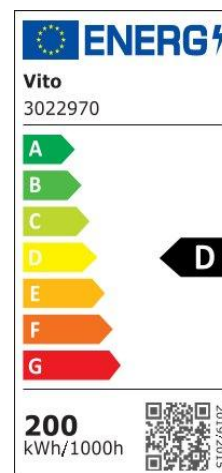

Area of application

3y warranty LED HIGH-BAY with LUMILEDS LED chip and 10kV SURGE PROTECTION for pendant-mounting indoor/outdoor lighting applications to be installed on ceilings of corridors in Warehouses, Industrial Places..

Product Advantages

TECHOLED is a family of suspended mounting highbays equipped with LUMILED brand SMD LEDs. Housing (heat sink) of die-cast aluminum alloy electrostatically painted in dark grey. Suspension ring of die-cast steel. Available with clear polycarbonate lenses for the 90° version with cover of glass. Constant current LED driver, equipped with shortcircuit, overload and overtemperature protections. This model also includes 10kV Surge Protection.

Product Data Sheet

OUTDOOR LIGHTING

TECHOLED-2 200W

CODE: 3022970

Product Features


Electrical

Power: 200Watt
Voltage: 100-277V AC ~ 50/60Hz
Power Factor: >0.9
Electrical Protection: Class I
Surge Protection: 10kV
Dimmability: NO
Switch Cycle: 25000 times

Material Characteristics

IP Class: IP65
IK Class: IK08
Material: Aluminum
Ambient Temperature: -10°C<ta<+50°C
Body Color: BLACK
Product Size: Ø330x68.2mm

Technical Drawing

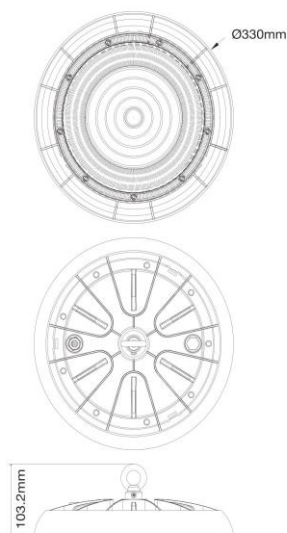


Lighting

Lumen: 24000 Lm
Luminaire efficacy: 120 Lm/W
Colour Temperature: 5000K (COOL WHITE)
Beam Angle: 90°
CRI : Ra >80
Lifetime: 25000 Hours
EEL : --

Packing Informations

Pieces/Outbox: 5
Outbox Size: 385x345x360 mm
Outbox G.W.: 8,7 Kg
Outbox Volume: 0,0478 m³
Unit Weight: 1740 gr
Barcode : 6977231350775

Light Distribution Curve

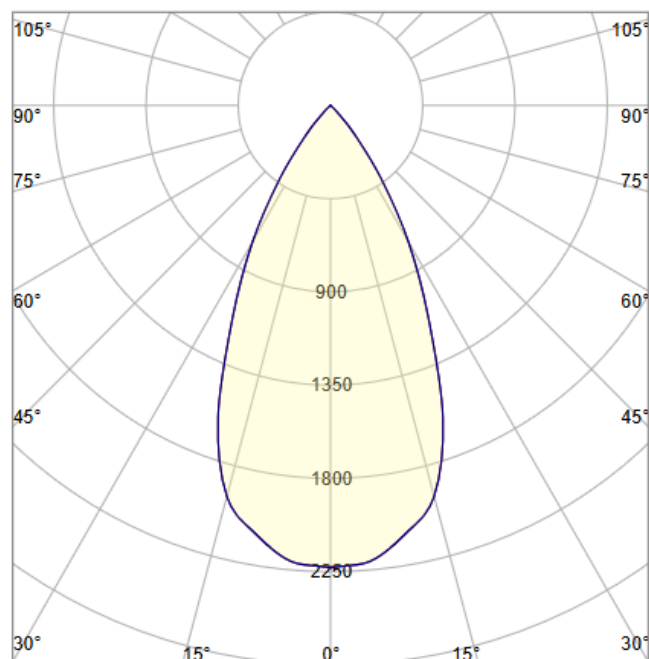

VITO EUROPE

102 Iztochna Tangenta str. 4th Floor

P.C. 1528, Sofia/Bulgaria

Phone: +359 2 4341575

E-mail: info@vitoeuropa.com

www.vitolighting.com