


# Product Data Sheet

## OUTDOOR LIGHTING

BINO 2W

CODE: 3231070

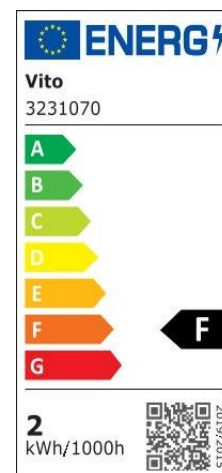

### Area of application

LED Outdoor Facade Lighting Fixtures for general outwall lighting applications. For Outwalls of offices, hospitals, schools, shopping malls, parks, warehouses, industrial facilities..

### Product Advantages

BINO is a wall mounting lighting fixture, equipped with technology of LED sources. arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6500K. Intended for surface installation. Housing of polycarbonate painted in sandy white & black. Difusser made by polycarbonate.

# Product Data Sheet

## OUTDOOR LIGHTING

BINO 2W

CODE: **3231070**

### Product Features


#### Electrical

Power: 2Watt  
Voltage: 220-240V AC ~ 50/60Hz  
Power Factor: >0.5  
Electrical Protection: Class II  
Surge Protection: --  
Dimmability: NO  
Switch Cycle: 30000 times

#### Material Characteristics

IP Class: IP65  
IK Class: -  
Material: PC  
Ambient Temperature: -20°C<ta<+50°C  
Body Color: BLACK  
Product Size: 110x100x40mm

#### Technical Drawing

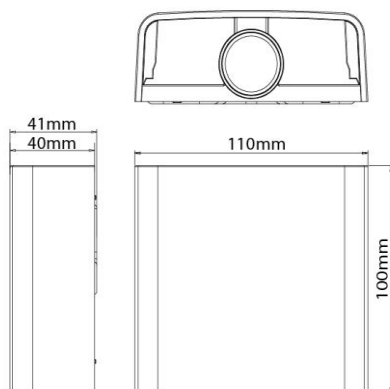


#### Lighting

Lumen: 180 Lm  
Luminaire efficacy: 90 Lm/W  
Colour Temperature: 3xCCT  
Beam Angle: 60°  
CRI : Ra >80  
Lifetime; 30000 Hours  
EEL : F

#### Packing Informations

Pieces/Outbox: 40  
Outbox Size: 557x401x158 mm  
Outbox G.W.: 9,88 Kg  
Outbox Volume: 0,0353 m<sup>3</sup>  
Unit Weight: 247 gr  
Barcode : 6970233835295

#### Light Distribution Curve

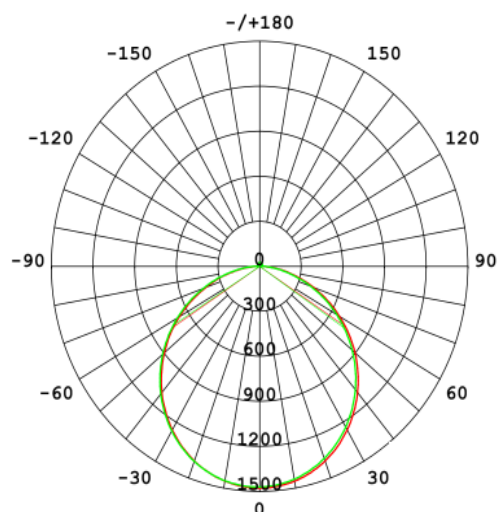

VITO EUROPE

102 Iztochna Tangenta str. 4th Floor

P.C. 1528, Sofia/Bulgaria

Phone: +359 2 4341575

E-mail: [info@vitoeuropa.com](mailto:info@vitoeuropa.com)

[www.vitolighting.com](http://www.vitolighting.com)