


Product Data Sheet

OUTDOOR LIGHTING

BINO 6W

CODE: 3231120

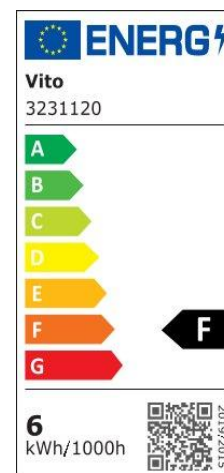

Area of application

LED Outdoor Facade Lighting Fixtures for general outwall lighting applications. For Outwalls of offices, hospitals, schools, shopping malls, parks, warehouses, industrial facilities..

Product Advantages

BINO is a wall mounting lighting fixture, equipped with technology of LED sources. arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6500K. Intended for surface installation. Housing of polycarbonate painted in sandy white & black. Difusser made by polycarbonate.

Product Data Sheet

OUTDOOR LIGHTING

BINO 6W

CODE: **3231120**

Product Features


Electrical

Power: 6Watt
Voltage: 220-240V AC ~ 50/60Hz
Power Factor: >0.5
Electrical Protection: Class II
Surge Protection: --
Dimmability: NO
Switch Cycle: 30000 times

Material Characteristics

IP Class: IP65
IK Class: -
Material: PC
Ambient Temperature: -20°C<ta<+50°C
Body Color: WHITE
Product Size: 160x100x40mm

Technical Drawing

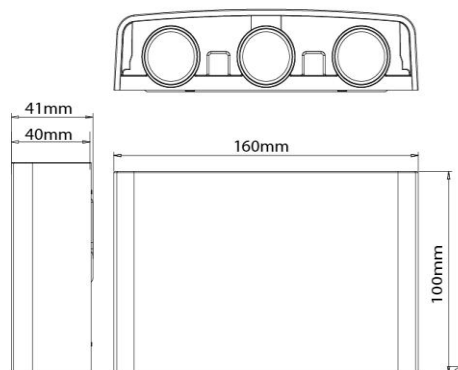


Lighting

Lumen: 540 Lm
Luminaire efficacy: 90 Lm/W
Colour Temperature: 3xCCT
Beam Angle: 60°
CRI : Ra >80
Lifetime; 30000 Hours
EEL : F

Packing Informations

Pieces/Outbox: 40
Outbox Size: 557x401x208 mm
Outbox G.W.: 13,06 Kg
Outbox Volume: 0,0465 m³
Unit Weight: 326,5 gr
Barcode : 6970233835349

Light Distribution Curve

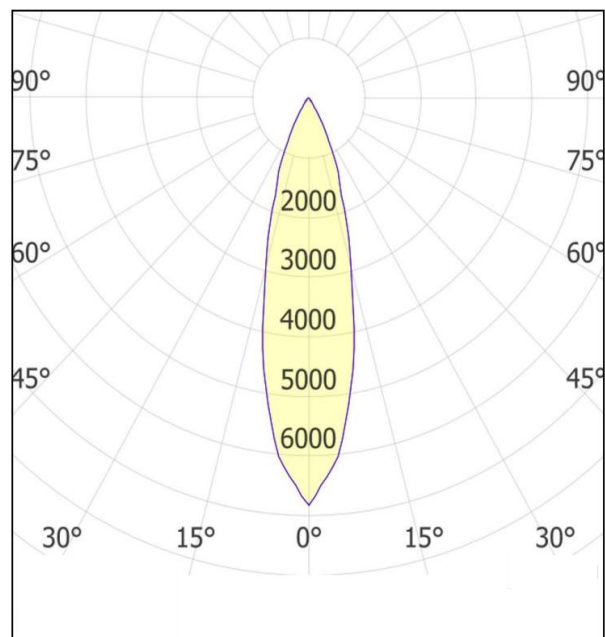

VITO EUROPE

102 Iztochna Tangenta str. 4th Floor

P.C. 1528, Sofia/Bulgaria

Phone: +359 2 4341575

E-mail: info@vitoeuropa.com

www.vitolighting.com