


TECHNICAL DATASHEET

EXIT-60 RECHARGEABLE EMERGENCY-EXIT LAMP

01-01-2024

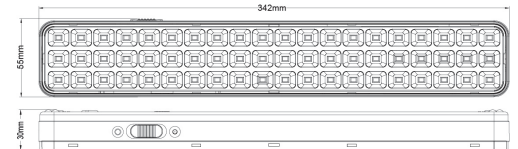

VT/EXIT-60/4W/WHT/LI-ION/2xSTICKERS/RECH.EMER.EXIT

NOTES 2 pieces EXIT sticker options and 0.75m charging cable are included in the package

General Informations

Stock Code	5020120
EAN-13 (Inbox Barcode)	6970233838364

Lighting Characteristics

Luminous Flux	320Lm-high 160Lm-low
Light Beam Angle	120°
LED Type	60x SMD 2835
CCT	6500K
CRI	Ra>80

Electrical Characteristics

Current Type	AC
Operation Voltage	100-240 Volt
Operation Frequency	50/60 Hertz
Power	4 Watt
Power Factor	>0,5
Dimmable	No
Electrical Protection Class	Class II

Mechanical Parameters

IP Protection Class	IP20
Switch On/Off Cycle	25000x times
Lifetime	50000 Hours
Body Material	ABS+PS
Body Colour	White
Body Size	342x55x30mm
Ambient Temperature (Ta)	-10°C<Ta<+40°C

Electrical Component Specifications

Battery Properties	Li-Ion 18650 3.7V 2Ah
Battery Discharge Time	3h-high 6h-low

Logistic Informations

Outbox Size	390*155*370 mm
Outbox Qty.	24 pcs
Outbox G.W.	7.6 kgs
Unit Weight	0,275 kgs

IMPORTANT NOTES: VITO reserves the right to change/remove models or specifications partially/completely without any notice. Information, models and photographs of the products in this technical datasheet can not be used, reproduced or republished without permission. However, some parts can be quoted by giving reference and/or chapter number belonging to technical datasheet. Most of the items in the datasheet have been designed by our company within indicated technical specifications inside. Our company is not responsible for errors caused by wrong installation and operating against rules according to qualifications specified in the product details. Photographs printed in this datasheet may not reflect the actual color of the product depending on printing conditions. In the same context, typographical errors may possibly be found in the texts.