


Product Data Sheet

OUTDOOR LIGHTING

ORI 15W



CODE: 2025650

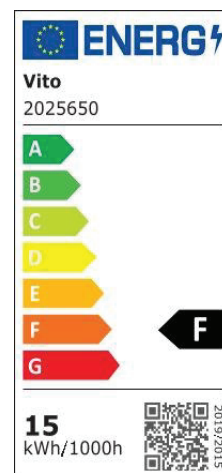

Area of application

Round Surface-Mount LED Outdoor Bulkhead with Full Plastic Body.

For surface-mounting outdoor lighting applications.

Ceilings or Walls of Corridors/Rooms in Warehouses, Parking Lots, Industrial Places.

Product Advantages

ORI series BULKHEADS with ABS body and Polycarbonate diffuser presents 1260Lm lighting performance and 25000Hours long lifetime. This 15W model includes 4000K (NATURAL WHITE) LED for 120° light beam-angle as desired lighting flexibility. It's ready to be operated with its easy installation and maintenance.

Product Data Sheet

OUTDOOR LIGHTING

ORI 15W

CODE: 2025650

Product Features

Electrical

Power: 15Watt

Voltage: 220-240V AC ~ 50/60Hz

Power Factor: >0.5

Electrical Protection: Class II

Surge Protection: --

Dimmability: No

Switch Cycle: 30000 times

Material Characteristics

IP Class: IP65

IK Class: IK06


Material: ABS & Polycarbonate

Ambient Temperature: -20°C<ta<+50°C

Body Color: GREY

Product Size: 125x215x59mm

Technical Drawing

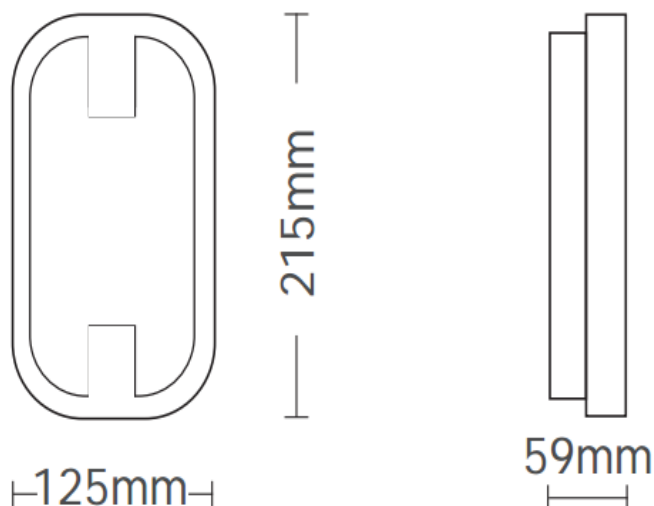

Lighting

Lumen: 1095 Lm

Luminaire efficacy: 73 Lm/W

Colour Temperature: 4000K (NATURAL WHITE)

Beam Angle: 120°

CRI : Ra >80

Lifetime; 25000 Hours

EEL : F

Packing Informations

Pieces/Outbox: 24

Outbox Size: 410x275x460 mm


Outbox G.W.: 8,93 Kg

Outbox Volume: 0,0519 m³

Unit Weight: 372,08 gr

Barcode : 6972538043443

Light Distribution Curve

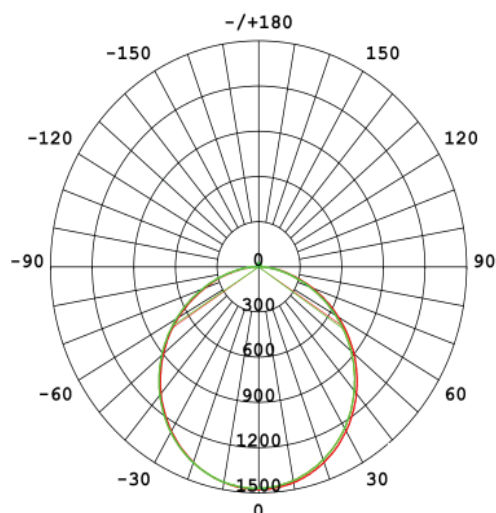

VITO EUROPE

102 Iztochna Tangenta str. 4th Floor

P.C. 1528, Sofia/Bulgaria

Phone: +359 2 4341575

E-mail: info@vitoeurope.com

www.vitolighting.com