


Product Data Sheet

INDOOR LIGHTING

WAVE 48W

CODE: 2026400

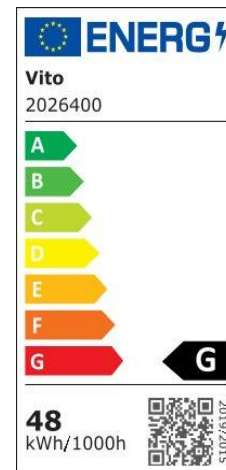

Area of application

Decorative LED Ceiling Fixture with 3xCCT function to be controlled by a DIP-switch. For pendant installation in indoor decorative lighting applications. Ceilings of corridors and rooms in homes, hotels, shopping malls, commercial areas..

Product Advantages

WAVE is a pendant lighting fixture, equipped with backlit technology of LED sources arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K. Housing of aluminum board & metal sheet electrostatically painted with sandblasted finishing in sandy white & black. Difusser made by PVC.

Product Data Sheet

INDOOR LIGHTING

WAVE 48W

CODE: 2026400

Product Features


Electrical

Power (Watt): 48
Voltage: 180-265V AC ~ 50/60Hz
Power Factor: >0.95
Electrical Protection: Class I
Surge Protection: --
Dimmability: NO
Switch Cycle (Times): 30000

Material Characteristics

IP Class: IP20
IK Class: -
Material: Aluminium+Metal-Sheet Body + PVC Diffusor
Ambient Temperature: -20°C<ta<+40°C
Body Color: WHITE
Product Size (mm): $\phi 600 \times H180$

Technical Drawing

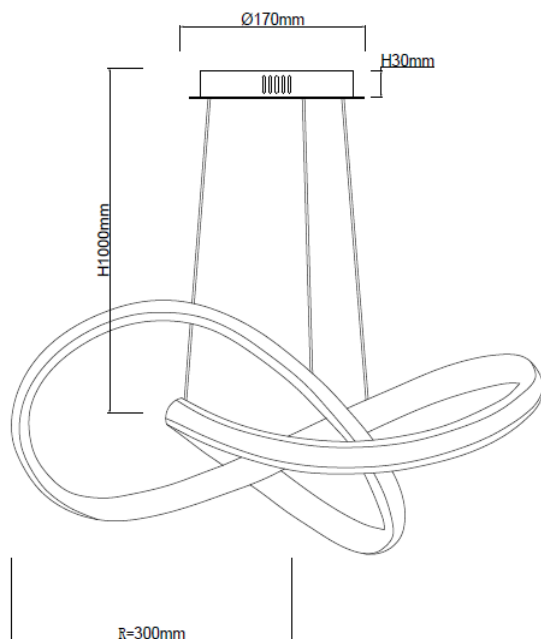


Lighting

Lumen (Lm): 2880
Luminaire efficacy (Lm/W): 60
Colour Temperature: 3CCT
Beam Angle: 120°
CRI: Ra >80
Lifetime (Hours): 30000
EEL : G

Packing Informations

Pieces/Outbox: 1
Outbox Size (mm): 670x670x200
Outbox G.W. (Kg): 2,25
Outbox Volume (m³): 0,0898
Unit Weight (Gr): 2250
Barcode : 6972538048745

Light Distribution Curve

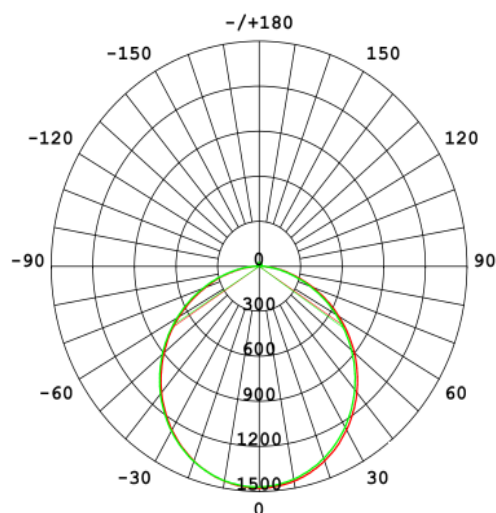

System Definition: VT/WAVE/ $\phi 600 \times H180$ /48W/3CCT-DIP/WHT

VITO EUROPE

102 Iztochna Tangenta str. 4th Floor

P.C. 1528, Sofia/Bulgaria

Phone: +359 2 4341575

E-mail: info@vitoeurope.com

www.vitolighting.com