

# Product Data Sheet

## INDOOR LIGHTING

EXIT-10 2W

CODE: 5020170



### Area of application

Rechargeable Emergency Exit LED Lighting which can be used as pendant or surface-mounted. For corridors of Supermarkets, Offices, Hospitals, Schools..

### Product Advantages

EXIT 10 is a rechargeable emergency fixture equipped with SMD LEDs. 2 in1, can be used as pendant or surface mounted. Battery: Lithium 14500 3.7V 500mAh. AC Charging. DC Operating. Charging time: 12-15h, Discharging time: 10h. Class II. Housing of ABS, diffuser of PS. Exit & other stickers are included. EU plug with 40cm cable included in the package.

# Product Data Sheet

## INDOOR LIGHTING

EXIT-10 2W

CODE: 5020170

### Product Features

#### Electrical

Power: 2Watt

Voltage: 100-240V AC ~ 50/60Hz

Power Factor: --

Electrical Protection: Class II

Surge Protection: --

Dimmability: NO

Switch Cycle: 25000 times

#### Material Characteristics

IP Class: IP20

IK Class: -


Material: ABS

Ambient Temperature: -10°C<ta<+40°C

Body Color: WHITE

Product Size: 255x210x23mm

#### Technical Drawing

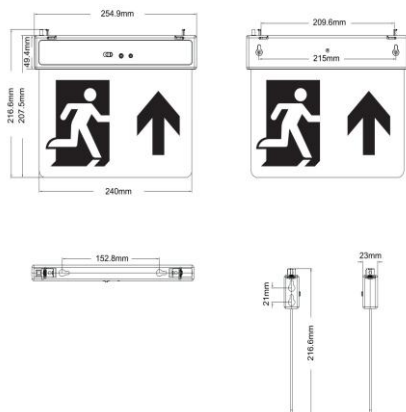

#### Lighting

Lumen: 100 Lm

Luminaire efficacy: 50 Lm/W

Colour Temperature: 6500K (COOL WHITE)

Beam Angle: 120°

CRI : Ra >80

Lifetime; 50000 Hours

EEL : --

#### Packing Informations

Pieces/Outbox: 20

Outbox Size: 325x275x500 mm

Outbox G.W.: 7,75 Kg

Outbox Volume: 0,0447 m<sup>3</sup>

Unit Weight: 387,5 gr

Barcode : 6970233838043

#### Light Distribution Curve

VITO EUROPE

102 Iztochna Tangenta str. 4th Floor

P.C. 1528, Sofia/Bulgaria

Phone: +359 2 4341575

E-mail: info@vitoeurope.com

[www.vitolighting.com](http://www.vitolighting.com)